

3200

FLEX ECONO-FOLD® PLANTER

The 3200 combines simplicity and reliability with the superior strength and flexibility you've come to expect from Kinze. What you get is a planter that easily adapts to rolling terrain and folds into a 6 row package for easy transportation.




ECONOMICAL WING-FOLD DESIGN. CENTER FLEX.

Available in a 12 row configuration, the wing-fold design of the 3200 allows for quicker transition from transport to planting, getting you into the field faster. Heavy-duty hinges in the tongue and toolbar allow the 3200 to center flex 13° up and 12° down. In addition, the individual row unit parallel linkages provide up to 10" of additional vertical movement.

FERTILIZER OPTIONS

Eliminate extra equipment and extra passes with a liquid fertilizer package – available with total capacity of 400 gallons (two 200 gallon tanks). Liquid fertilizer piston pump packages include CDS-John Blue® piston pumps, flow dividers and ground drive system.

Fertilizer openers are available for use with any tillage system. Choose from heavy duty, notched single disc or our double disc fertilizer openers. If more depth control is needed, you can add optional notched single disc opener depth/gauge wheels.

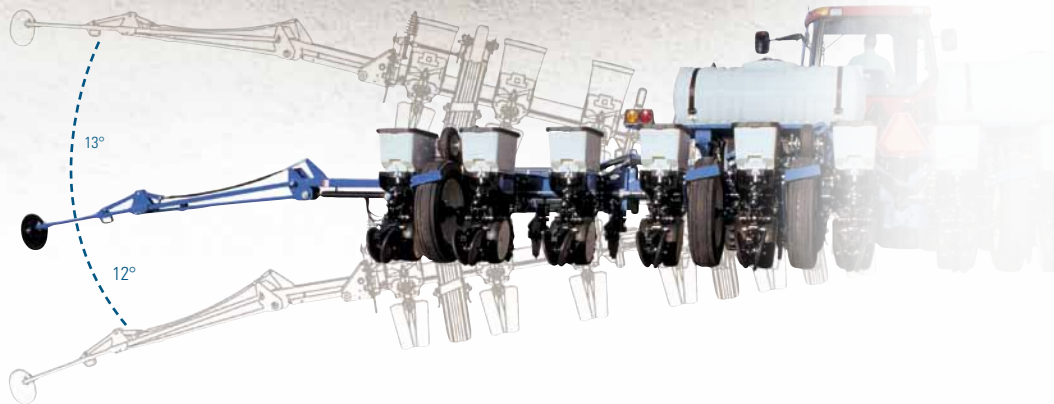

KPM III ELECTRONIC SEED MONITOR

- Available with either magnetic or radar distance sensor options.
- Console features a single LCD to display seed count and alphanumeric planting data.
- Segmented bar graphs display up to 36 rows simultaneously in front/rear or left/right configurations.
- Alphanumeric data includes speed, row spacing, seed spacing (by row or overall average), and seed population (by row or overall average).
- Multiple area counters (40) allow total area and field areas to be compiled.
- Audible alarms and LCD backlighting are programmable.

KINZE EDGEVAC®

- The leading edge in vacuum seed metering.
- Excellent seed spacing and population control.
- Consistent seed drop from the edge.
- Less tumbling action or ricochet effect inside seed tube.
- Fewer moving parts, less service and maintenance.
- Self-adjusts to maintain vacuum seal.



KINZE[™]
WWW.KINZE.COM

3200

FLEX ECONO-FOLD PLANTER



SPECIFICATION

Number of Rows	12
Row Spacing	30"
Weight Empty (Mechanical)	7,500 lb.
Weight Empty (EdgeVac)	8,066 lb.
Operation Length	17' 9"
Transport Height	9' 1"
Operation Width	31' 4"
Transport Width	16' 2"

KEY FEATURES

- **Wing-Fold Design** – makes the transition from planting to transport in minutes. A safety pin locks each wing in the folded transport position and heavy-duty eyebolts lock and unlock the hinge assemblies in the planting position.
- **Longer Hinge Plate Design** – creates sufficient fore and aft space for fertilizer openers and row unit mounted attachments.
- **Frame Flexibility** – 25° of center-flex movement (13° up and 12° down).
- **Low-Profile, Triple-Folding Row Markers** – equipped with 16" diameter solid marker blades with depth bands. A hydraulic sequence valve with flow controls alternates the markers automatically, or allows both to be lowered at the same time.
- **Contact Drive System** – spring-loaded contact drive tires eliminate mechanical clutches and smooth the engagement and disengagement of the drive – helping to reduce residue, rock and mud problems.

- **Easy Access Transmissions** – lets you set planting rates for each half of the planter.
- **Split Drive** – maintains more consistent populations across the planter in contours.
- **Quick-Adjustable Down-Force Springs** – provides four positions of down pressure adjustment.

MORE OPTIONS

- Hydraulic Wing-Fold
- Electronic Seed Monitor (KPM III)
- Rubber V Closing Wheels
- Cast Iron Closing Wheels
- Half Rate (2 to 1) Drive Reduction Packages
- Quick-Adjustable Down-Force Springs
- Hydraulic Wing-Fold Packages
- Point Row Clutch Packages
- Liquid Fertilizer Packages
 - Two 200 gallon tanks with lids
 - Liquid Fertilizer Openers
 - Liquid Fertilizer Pumps



KINZE™

Kinze Manufacturing, Inc.
I-80 at Exit 216 • Williamsburg, Iowa • 52361-0806 USA
www.KINZE.com